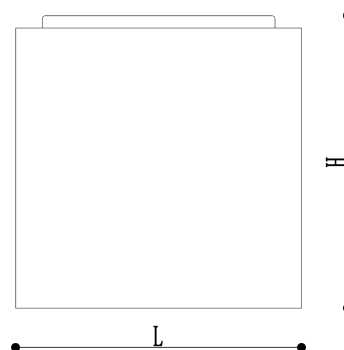


## Product Feature

Surface-mounted downlight

Aluminium housing, powder painted

Basic colors: white, black, silver

RAL colors on demand

Flat transparent tempered glass

High purity anodised aluminium reflector

Electronic driver embedded (dimming driver on demand)

The LED light source is of different manufacturers applicable

Thermal dissipation for high performance and long time

## Technical Data

| Product Code | Light Source | Luminous Flux | Power | Color Temperature | CRI | Beam Angle | L(mm) | H(mm) |
|--------------|--------------|---------------|-------|-------------------|-----|------------|-------|-------|
| H-LB401-3M   | COB          | 500lm         | 7W    | 3000K,4000K       | >80 | 40°        | Φ100  | 103   |
| H-LB401-4M   | COB          | 840lm         | 12W   | 3000K,4000K       | >80 | 40°        | Φ140  | 145   |
| H-LB401-6M   | COB          | 1500lm        | 20W   | 3000K,4000K       | >80 | 40°        | Φ180  | 185   |
| H-LB401-8M   | COB          | 2200lm        | 30W   | 3000K,4000K       | >80 | 40°        | Φ220  | 225   |