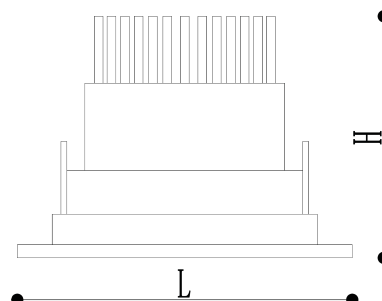


Product Feature

Gimbal recessed spotlight

15°tiltable

Aluminium die cast ceiling trim, powder painted

Aluminium die cast housing, powder painted

Basic colors: white, black, silver

RAL colors on demand

Flat transparent tempered glass

High purity anodised aluminium reflector

Remote electronic driver included (dimming driver on demand)

The LED light source is of different manufacturers applicable

Passive cooling: heat dissipation via alu.heat sink

Technical Data

Product Code	Light Source	Luminous Flux	Power	Color Temperature	CRI	Beam Angle	L(mm)	H(mm)	Cutting Hole(mm)
2340-3	COB	750lm	9W	3000K,4000K	>80	24°,60°	Φ115	85	Φ95
2340-4	COB	1150lm	15W	3000K,4000K	>80	24°,60°	Φ145	101	Φ120
2340-5	COB	1900lm	25W	3000K,4000K	>80	24°,60°	Φ160	115	Φ130
2340-6	COB	2800lm	40W	3000K,4000K	>80	24°,60°	Φ180	132	Φ150