




TRIDONIC

OSRAM

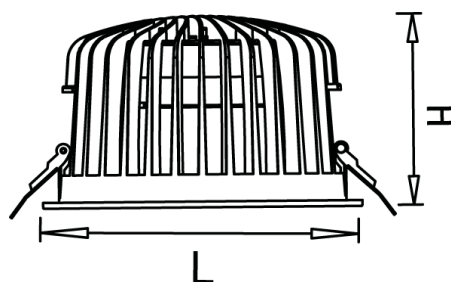

Product Feature

Recessed downlight

Aluminium die cast ceiling trim, powder painted

Aluminium die cast housing, powder painted

Basic colors: white, black, silver

RAL colors on demand

Flat transparent tempered glass

High purity anodised aluminium reflector

Remote electronic driver included (dimming driver on demand)

The LED light source is of different manufacturers applicable

Passive cooling: heat dissipation via alu.heat sink

Technical Data

Product Code	Light Source	Luminous Flux	Power	Color Temperature	CRI	Beam Angle	L(mm)	H(mm)	Cutting Hole(mm)
CUBE 60A	OSRAM/PL-CUBE-AC-2000-G2	2000lm	25.3W	3000K,4000K	≥80	60°	Φ185	115	Φ170
	TRIDONIC/DLE G2 AC	1090lm	11.8W		≥80				
CUBE 80A	OSRAM/PL-CUBE-AC-3000-G2	3000lm	38.4W	3000K,4000K	≥80	60°	Φ220	128	Φ205
	TRIDONIC/DLE G2 AC	1943lm	22W		≥80				